
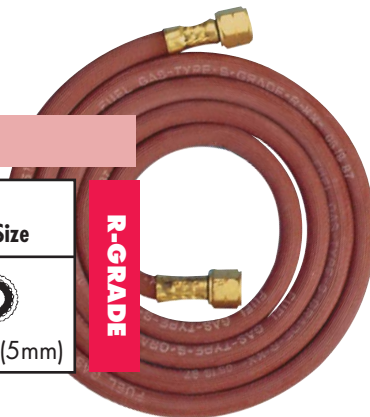


## Single Hoses For Acetylene

**IMPORTANT NOTE:** The Grade "R" hose is for use with acetylene only as specified by the RMA-CGA Hose Standard. "T" Grade hose must be used with all other gases.

### SINGLE "R" GRADE HOSES FOR ACETYLENE ONLY - Red Hose

Stock No.	Length	Diameter	Weight (lbs.)	Connections	Use With Torches	I.D. Size
<b>RL121</b>	12-1/2 ft. (3.8m)	3/16" (5mm)	1-1/4 (.55kg)	9/16"-18 LH ("B")	NE180 Handi-Heat	 3/16" (5mm)



## Single Hoses


### SINGLE HOSE - Inert Gas - Black Hose

Stock No.	Use For	Length	Diameter	Connections	<b>INERT</b>
<b>7294-1</b>	Inert Gas	6 ft. (1.8m)	1/4" (6mm)	5/8"-18 RH Male	



### SINGLE HOSE FOR NITROGEN

Heavy Duty Charging Hose for use with Nitrogen for HVAC Purging Applications

Stock No.	Length	Connections		Use With Regulators	I.D. Size	<b>INERT</b>
		to Regulator	to A/C Unit			
<b>RL260</b>	6 ft. (1.8m)	7/16"-20 RH Internal	7/16"-20 RH w/core	30-450-580 depress to open Schraeder Valve	 1/4" (6mm)	



### LITTLE TORCH™ REPLACEMENT HOSES

Stock No.	Length	Hose Type
<b>13254-1-8</b>	8'	Oxygen
<b>13254-3-8</b>	8'	Any Fuel
<b>13254-4-8</b>	8'	Oxygen/Fuel



**NOTE:** "B" - 9/16" Hose Fittings.  
Replacement hoses Include Installation tool 7799 and Ferrule 7582.

### QUICKBRAZE™ REPLACEMENT HOSES

Stock No.	Length	Hose Type	Hose Fittings
<b>14777-4-10</b>	10'	Oxygen/Fuel	"A"- 3/8"
<b>14778-4-10</b>	10'	Oxygen/Fuel	"B"- 9/16"



**NOTE:** "A" & "B" - 9/16" Hose Fittings.  
Replacement hoses Include Installation tool 7799 and Ferrule 7582.

### Kevlar® Brazing Hose



**14779-4-10**  
"A" & "B" Fitting Twin Hose  
3/8" and 9/16"  
Female Connections

### Kevlar® Hose Features & Benefits

Extremely durable, heat resistant, light weight and flexible. Excellent for repetitious brazing operations. (Not recommended for use with cutting attachment.)

**NOTE:** For AW1A Handle only.

Hoses